


PROJECT BATTEN (LPB) T5

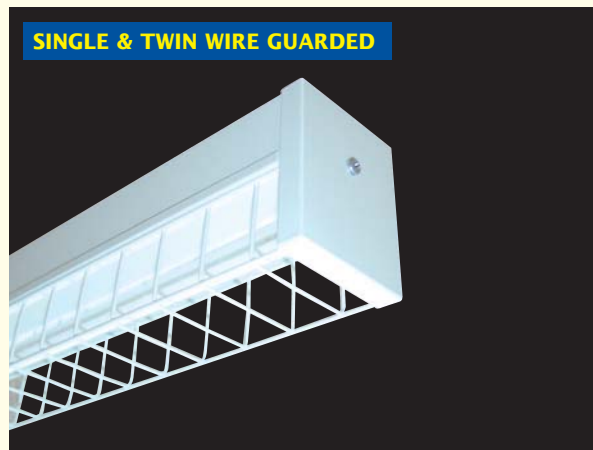

FEATURES

- Single & twin tube models
- Single width body for both single & twin tube models
- Bare tube, diffused, wire guarded, reflected & open end industrial reflected models
- 14 & 24 watt 600mm lengths
- 21 & 39 watt 900mm lengths
- 28 & 54 watt 1200mm lengths
- Energy efficient T5 linear fluorescent lamps
- Electronic control gear
- White powder coated metal body & end caps
- Prismatic acrylic square style diffusers
- White powder coated metal wire guards
- White powder coated metal reflectors
- White powder coated metal open end industrial reflectors
- Metal surfaces pretreated and degreased before being polyester epoxy powder coated and baked for high protection and quality finish
- Diffuser, wire guard & reflector kits available as add on attachments to the bare tube model
- IP20 degree of protection

APPLICATION

- Domestic or commercial general Lighting
- Under cover car parks
- Workshops

SINGLE BARE

LPB114T5	1/14w
LPB124T5	1/24w
LPB121T5	1/21w
LPB139T5	1/39w
LPB128T5	1/28w
LPB154T5	1/54w

TWIN BARE

LPB214T5	2/14w
LPB224T5	2/24w
LPB221T5	2/21w
LPB239T5	2/39w
LPB228T5	2/28w
LPB254T5	2/54w

SINGLE DIFFUSED

LPBS114T5	1/14w
LPBS124T5	1/24w
LPBS121T5	1/21w
LPBS139T5	1/39w
LPBS128T5	1/28w
LPBS154T5	1/54w

TWIN DIFFUSED

LPBS214T5	2/14w
LPBS224T5	2/24w
LPBS221T5	2/21w
LPBS239T5	2/39w
LPBS228T5	2/28w
LPBS254T5	2/54w

SINGLE WIRE GUARD

LPBW114T5	1/14w
LPBW124T5	1/24w
LPBW121T5	1/21w
LPBW139T5	1/39w
LPBW128T5	1/28w
LPBW154T5	1/54w

TWIN WIRE GUARD

LPBW214T5	2/14w
LPBW224T5	2/24w
LPBW221T5	2/21w
LPBW239T5	2/39w
LPBW228T5	2/28w
LPBW254T5	2/54w

PROJECT BATTEN (LPB) T5



Manufactured to standards – IEC60598.1
IEC60598.2.1
IEC60598.2.2
CISPR15
EMC Compliant Supplier Code N1562 (Aust)



“When your business depends on light.”

PROJECT BATTEN (LPB) T5 ACCESSORIES

SINGLE/TWIN DIFFUSED KIT

LPBSK600T5	1-2/14-24w
LPBSK900T5	1-2/21-39w
LPBSK1200T5	1-2/28-54w

SINGLE/TWIN WIRE GUARD KIT

LPBWK600T5	1-2/14-24w
LPBWK900T5	1-2/21-39w
LPBWK1200T5	1-2/28-54w


SINGLE/TWIN REFLECTOR KIT

LPBRK600T5	1-2/14-24w
LPBRK900T5	1-2/21-39w
LPBRK1200T5	1-2/28-54w


SINGLE/TWIN IND REFLECTOR KIT

LPBIRK600T5	1-2/14-24w
LPBIRK900T5	1-2/21-39w
LPBIRK1200T5	1-2/28-54w


SINGLE BARE




TWIN BARE





SINGLE/TWIN DIFF/WG




SINGLE/TWIN REFLECTOR KIT



SINGLE/TWIN IND REFLECTOR KIT

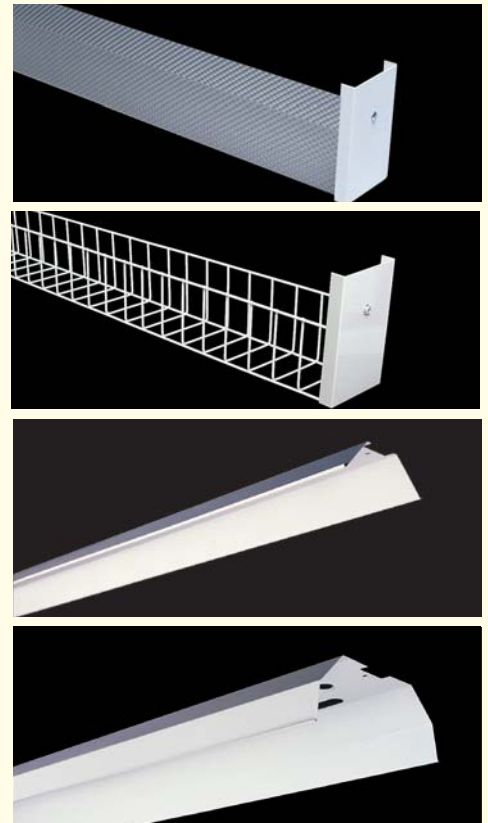


14/24w SINGLE & TWIN

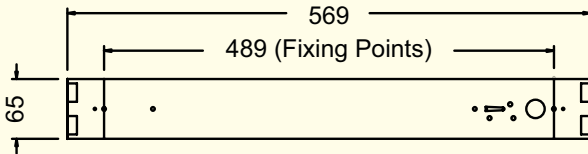


LPBJP1

Single & twin tube models


Powder coated metal joining plate bracket to inline mount diffused & wire guarded models.



21/39w SINGLE & TWIN

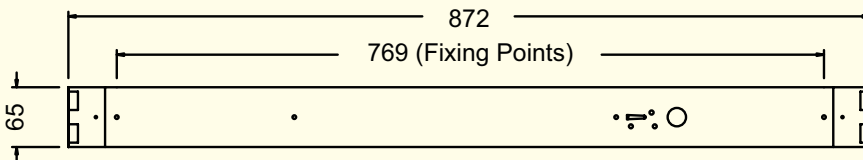

28/54w SINGLE & TWIN

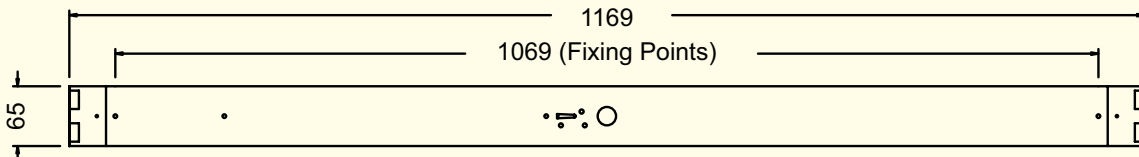

AUSTRALIA ALL STATES Tel: 1300851001 **INDONESIA JAKARTA** Tel: +62 (21) 6904933 Fax: +62 (21) 6906987

MALAYSIA KUALA LUMPUR Tel:+60 (3) 5634348 Fax: +60 (3) 5634352 **PENANG** Tel: +60 (4) 5070580 Fax: +60 (4) 5070968

SINGAPORE Tel: +65 6742511 Fax: +65 6745828 **SOUTH PACIFIC ISLANDS BRISBANE** Tel: +61 (7) 38211315 Fax: +61 (7) 38211315

THAILAND BANGKOK Tel: +66 (2) 3825129 Fax: +66 (2) 3825128 **VIETNAM HOCHIMINH CITY** Tel: +84 8655011 Fax: +84 8622855

Distributors in: Bangladesh, Brunei, Fiji, Papua New Guinea, Sri Lanka

Lighting designs on request

IES files on request or available on Davis website

Website: www.davislighting.com

Email: sales@davislighting.com

Davis Lighting is a registered trade name

Davis Lighting reserves the right to change specifications and materials without prior notice. Materials and components may vary from region to region.



*“When your
business
depends
on light.”*