

CIRCULAR


OYSTER CEILING LIGHTS

The oyster construction consists of a white acrylic diffuser held on a discreet metal base by three unobtrusive catches forming a low circular profile. EPDM seals are provided between the body at the ceiling and also at the body to the diffuser. These seals restrict insect intrusion to give a clean overall appearance. Installation is made easy with the electronic control gear integral to the luminaire. The oyster is complimented by an emergency version which is housed in the 40W electronic oyster. The oyster is an ideal selection for areas requiring an unbroken array of luminaires, dining areas, foyers, corridors, shopping malls and homes.

CFT Circular Fluorescent

White powder coated metal base with opal PMMA (acrylic) diffuser.

| | | |
|----------------|----------|-----------------|
| CFT22 | 1/22w T9 | 295(D) x 85(H) |
| CFT32 | 1/32w T9 | 390(D) x 110(H) |
| CFT40 | 1/40w T9 | 495(D) x 125(H) |
| CFT22T5 | 1/22w T5 | 295(D) x 85(H) |
| CFT40T5 | 1/40w T5 | 435(D) x 125(H) |

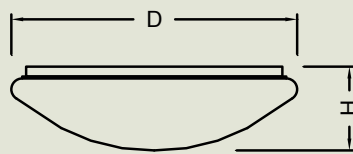


ABD Incandescent

White plastic base with opal plastic diffuser. 75w GLS maximum (or equivalent CFL energy saving lamp). Maximum lamp diameter 62mm.

ABD7501 1/75w GLS 265 x 120

Lamp holder E27.

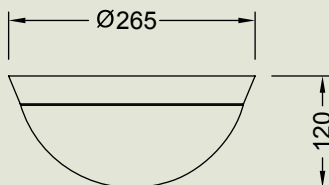

ABD Compact Fluorescent

White plastic base with opal plastic diffuser.

ABD2901 2/9w PL 265 x 120

Lamp holder G23. Lamps max 9w TC-S.

Calypso Circular

Black powder coated cast aluminium base with opal PC diffuser.

CY226 2/26w PL

