

EMERGENCY

AWF SERIES

The AWF range is an IP65 protection weatherproof luminaire suitable for surface or pendant mounting. The body is constructed from corrosion resistant, glass reinforced, auto extinguishing polyester. The diffuser is impact resistant polycarbonate. The luminaire is supplied with stainless steel clips.


AWF T8

Weatherproof Diffused



Single tube

AWF118CPENM	1/18w	666mm	Non-maintained
AWF118CPEM	1/18w	666mm	Maintained
	C0:	A32, B32, C32, D25 , E32	
	C90:	A32, B32, C32, D12.5 , E25	

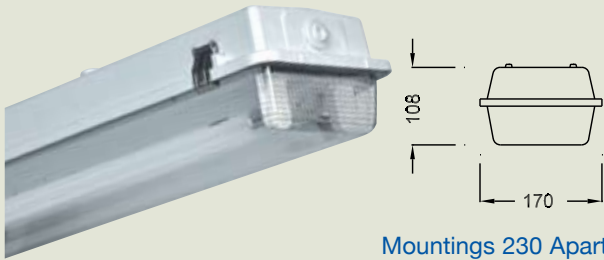

Weatherproof Diffused



Single tube

AWF136CPENM	1/36w	1275mm	Non-maintained
AWF136CPEM	1/36w	1275mm	Maintained
	C0:	A40, B40, C40, D40 , E40	
	C90:	A40, B40, C40 , D10, E25	

AWF158CPENM	1/58w	1570mm	Non-maintained
AWF158CPEM	1/58w	1570mm	Maintained
	C0:	A63, B63, C63, D63 , E63	
	C90:	A63, B63, C50 , D12.5, E40	




Weatherproof Diffused

Twin tube

AWF218CPEM	2/18w	666mm	Maintained
AWF218CPES	2/18w	666mm	Sustained
	C0:	A32, B32, C32, D25 , E32	
	C90:	A32, B32, C32 , D8, E20	
	C180:	A32, B32, C32, D32 , E32	

AWF236CPEM	2/36w	1275mm	Maintained
AWF236CPES	2/36w	1275mm	Sustained
	C0:	A63, B63, C63, D40 , E50	
	C90:	A63, B63, C63 , D16, E40	
	C180:	A63, B63, C63, D63 , E63	

AWF258CPEM	2/58w	1570mm	Maintained
AWF258CPES	2/58w	1570mm	Sustained
	C0:	A80, B80, C80, D50 , E63	
	C90:	A80, B80, C80 , D20, E50	
	C180:	A80, B80, C80, D80 , E63	

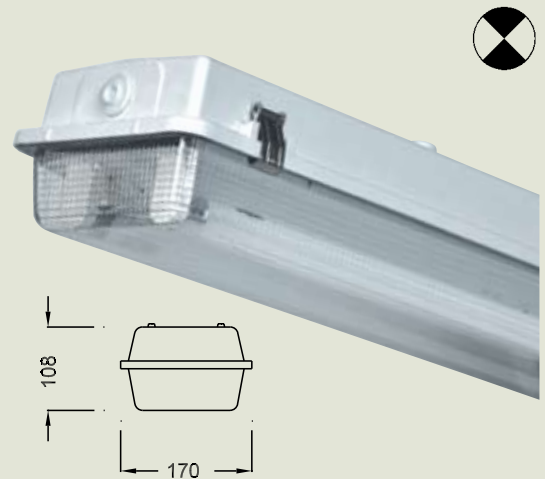

18W Mountings 230 Apart, 36W & 58W Mountings 840 apart

EMERGENCY

AWF T5

Weatherproof Diffused




Single tube

AWF128T5CPENM	1/28w	1275mm	Non-maintained
AWF128T5CPEM	1/28w	1275mm	Maintained

C0: A63, B63, C50, **D32**, E32

C90: A63, B63, C63, **D20**, E50

Mountings 840 Apart

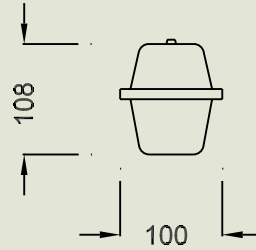

Weatherproof Diffused



Twin tube

AWF214T5CPEM	2/14w	666mm	Maintained
AWF214T5CPES	2/14w	666mm	Sustained

C0: A25, B25, C25, **D16**, E20

C90: A25, B25, **C20**, D5, E16

C180: A20, B20, C20, **D20**, E20


AWF228T5CPEM	2/28w	1275mm	Maintained
AWF228T5CPES	2/28w	1275mm	Sustained

C0: A40, B40, C40, **D32**, E40

C90: A50, B40, **C32**, D10, E25

C180: A50, B50, C50, **D50**, E40

14W Mountings 230 Apart, 28W Mountings 840 apart

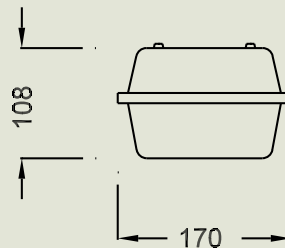

EMERGENCY

SWP SERIES

The SWP range is an IP65 protection weatherproof luminaire suitable for surface or pendant mounting. The body & diffuser are constructed from UV stabilised polycarbonate. The clips are stainless steel.


Weatherproof Diffused



Single tube

SWP118CPENM	1/18w	670mm	Non-maintained
SWP118CPEM	1/18w	670mm	Maintained

C0: A25, B25, C25, **D25**, E25
C90: A25, B25, C20, D6.3, **E20**

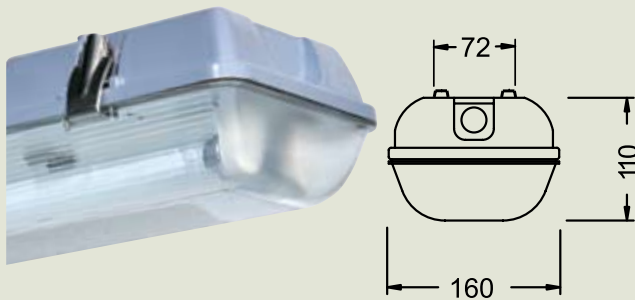

Mountings • Pendant 473 • Surface 473x25

Weatherproof Diffused




Single tube

SWP136CPENM	1/36w	1270mm	Non-maintained
SWP136CPEM	1/36w	1270mm	Maintained

C0: A63, B63, C63, **D63**, E50
C90: A63, B63, **C50**, D12.5, E40

SWP158CPENM	1/58w	1570mm	Non-maintained
SWP158CPEM	1/58w	1570mm	Maintained

C0: A63, B63, C63, **D63**, E63
C90: A63, B63, C50, **D16**, E40

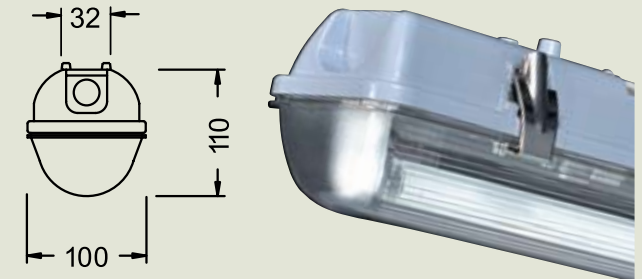

36W Mountings • Pendant 902 • Surface 902x25
58W Mountings • Pendant 965 • Surface 965x25

Weatherproof Diffused



Twin tube

SWP218CPEM	2/18w	670mm	Maintained
SWP218CPES	2/18w	670mm	Sustained

C0: A40, B40, C40, **D25**, E25
C90: A40, B40, **C32**, D8, E25
C180: A40, B40, C40, **D40**, E40

SWP236CPEM	2/36w	1270mm	Maintained
SWP236CPES	2/36w	1270mm	Sustained

C0: A50, B50, C50, **D40**, E40
C90: A50, B50, **C50**, D12.5, E25
C180: A63, B63, C63, **D50**, E50

SWP258CPEM	2/58w	1570mm	Maintained
SWP258CPES	2/58w	1570mm	Sustained

C0: A80, B80, C80, **D50**, E63
C90: A80, B80, **C80**, D20, E50
C180: A80, B80, C80, **D80**, E80



36W Mountings • Pendant 902 • Surface 902x25
58W Mountings • Pendant 965 • Surface 965x25