

# TRADERS SLT

**Combining remarkable efficiency at 160 lm/W with ME1 classification - both visual elegance and optimal performance for diverse lighting applications.**

# TRADERS SLT

## Urban

### Features

- Elegant & super-slim aesthetics
- Super luminaire efficiency up to 160 lm/W
- Up to ME1 lighting class application
- Flexible and intelligent drivers for smart city
- Low wind area and drop protector
- Tool free installation and maintenance
- Sleek design & robust
- IP66 and IK09
- 1-10V dimming

### Applications

- Residential
- Urban & Building

### Standards

- IEC 60598-2-1
- IEC 60598-2-3
- IEC/AS/NZS CISPR 15
- Manufactured under ISO 9001:2015 standards

### Mounting Methods



Pole Mount



Side Mount

# TRADERS SLT

Urban

## Product Code Key

Model	Power	- CRI & CCT
SLT	40 =40w	R73 =CRI>70, 3000K
	60 =60w	R74 =CRI>70, 4000K
	70 =70w	R77 =CRI>70, 6500K
	100 =100w	
	120 =120w	
	150 =150w	
	180 =180w	

eg: SLT150-R73 = SLT 150w, CRI>70, 3000K


## Specifications

TRADERS SLT	SLT40	SLT60	SLT70	SLT100	SLT120	SLT150	SLT180
Nominal Power (W)	40	60	70	100	120	150	180
Input Voltage (V)	220-240						
Frequency (Hz)	50/60						
Luminous Flux (lm)	6400	9600	11200	16000	19200	24000	28800
Efficacy (lm/W)	160						
CRI	>70						
Power Factor	>0.9						
SDCM	<5						
CCT (K)	3000/4000/6500						
Product Lifetime (L70B50)	>50000						
Operating Temp. (°C)	-20 to 50						
Weight (kg)	1.5	1.9		2.4		2.5	
IP Rating	IP66						
Product Carton qty per box	1						
Product Carton Dimension (mm)	460 x 130 x 120	487 x 216 x 120		584 x 240 x 120		662 x 264 x 120	
Product Carton Weight (kg)	1.6	2.1		2.7		2.8	

# TRADERS SLT


Urban

## Lighting Distribution

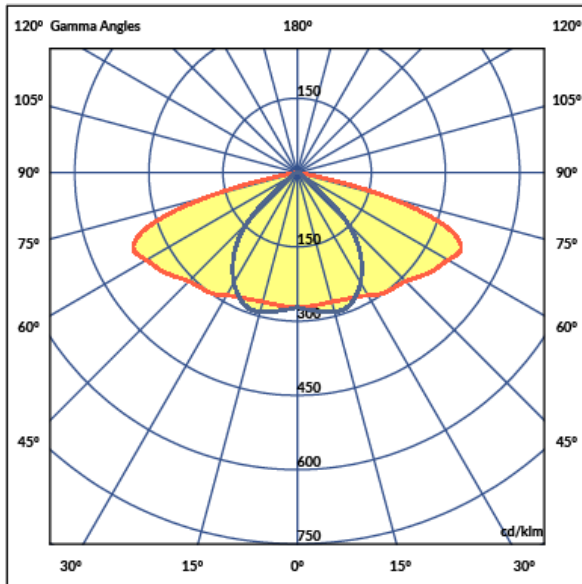


## Dimensions


SLT40




SLT60/70

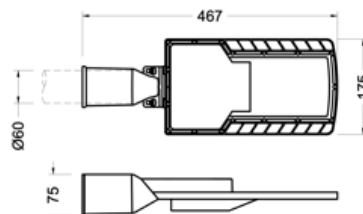

SLT100/120

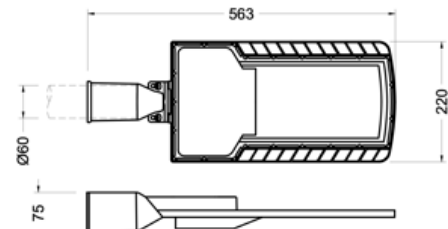

SLT150/180

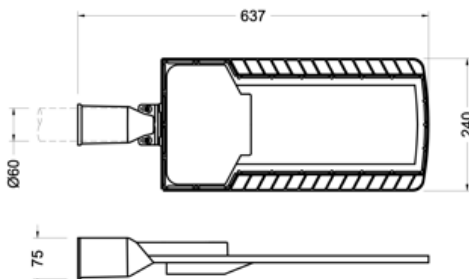

[davislighting.com](http://davislighting.com) [davislighting.com.au](http://davislighting.com.au)

All photometric and electrical data published are of  $\pm 10\%$  tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

Generated on: 26-05-2024. Please contact the nearest Davis Lighting Sales Office or check our website for the latest product specifications.