

CRESSIDA CRFM

Specialist Lighting / Cleanroom, Troffer



CRFMW230-R94

Features

- Clean screw-less magnetic cover
- Advanced optical design to deliver optimum performance and glare control
- Low glare microprism diffuser
- Clear diffuser layer for easy cleaning
- Tunable white options for Circadian lighting design
- IP65 and IK08 rated
- Solid and sturdy crank bracket install system
- Class ISO 3 certified to DIN
- EN ISO 14644-1



Applications

- Industrial cleanroom
- Laboratory
- Hospital / Healthcare
- Food preparation area

Options

- DALI control
- Tuneable white
- Smart sensor control
- Anti-microbial paint
- COI compliant

Standards

Manufactured under ISO 9001:2015 to standards

- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.1
- IEC/AS/NZS 60598.2.2
- IEC/AS/NZS CISPR 15

Mounting Methods



Recessed



CRESSIDA CRFM

Specialist Lighting / Cleanroom, Troffer



Specifications

Model	CRFMW230-R94
Nominal Power (W)	30
Input Voltage (V)	220-240
Frequency (Hz)	50/60
Luminaire Flux (lm)	3038
Luminaire Efficacy (lm/W)	102
CRI (Ra)	>90
Power Factor	>0.95
SDCM	3
CCT (K)	4000
Luminaire Rated Life (hr)	50000
Ambient Temp. ta (°C)	45
Operating Temp. (°C)	-25 to +50
Weight (kg)	13
IP Rating	IP65
IK Rating	IK08

Packaging Details

Model	CRFMW230-R94
Product Carton Qty per box (pc)	1
Product Carton Dimension (mm)	725 x 725 x 126
Product Carton Weight (kg)	17


CRESSIDA CRFM

Specialist Lighting / Cleanroom, Troffer



DAVISLIGHTING

Lighting Data

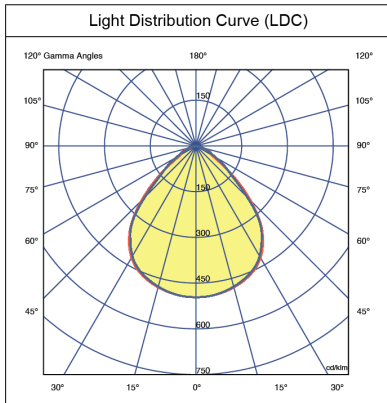

Dimensions

