

# PHOEBE CT

Commercial Lighting / Batten

## PBD420CT

### Features

- Colour temperature selectable
- White powder coated mild steel body
- Opalised polycarbonate diffuser
- Quick and easy installation
- Suitable for surface or pendant mount

### Applications

- Retail shops
- Kitchens, canteens
- Public amenities
- Corridor and entrance areas
- Covered carpark, workshops


### Options

- Dimmable
- Sensor
- Emergency

### Standards

Manufactured under ISO 9001:2015 to standards  
IEC/AS/NZS 60598.1  
IEC/AS/NZS 60598.2.1  
IEC/AS/NZS CISPR 15

### Mounting Methods

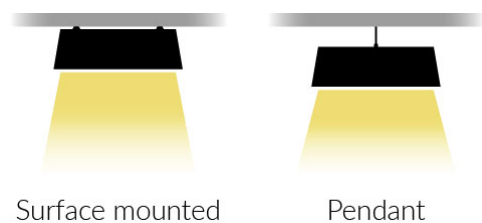

# PHOEBE CT

Commercial Lighting / Batten


## Specifications

Model	PBD420CT
Nominal Power (W)	30
Input Voltage (V)	220 - 240 VAC 50 / 60 Hz
Luminaire Flux (lm)	2240
Luminaire Efficacy (lm/W)	112
CRI (Ra)	> 80
Power Factor	> 0.90
CCT (K)	3000/4000/6500
Luminaire Rated Life (hr)	30000
Ambient Temp. ta (°C)	35
Weight (kg)	1.9

## Packaging Details

Model	PBD420CT
Product Carton Qty per box (pc)	1
Product Carton Dimension (mm)	1177 X 70 X 79

## Lighting Data

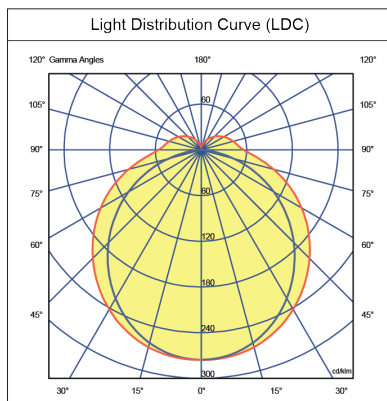

# PHOEBE CT

Commercial Lighting / Batten

## Dimensions

