

# PHOEBE CT

Commercial Lighting / Batten

## PBD435CT

### Features

- Colour temperature selectable
- White powder coated mild steel body
- Opalised polycarbonate diffuser
- Quick and easy installation
- Suitable for surface or pendant mount

### Applications

- Retail shops
- Kitchens, canteens
- Public amenities
- Corridor and entrance areas
- Covered carparks, workshops

### Options

- Dimmable
- Sensor
- Emergency

### Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.1
- IEC/AS/NZS CISPR 15

### Mounting Methods



Surface mounted

Pendant



# PHOEBE CT

Commercial Lighting / Batten


## Specifications

Model	PBD435CT
Nominal Power (W)	35
Input Voltage (V)	220 - 240 VAC 50 / 60 Hz
Luminaire Flux (lm)	4220
Luminaire Efficacy (lm/W)	120
CRI (Ra)	> 80
Power Factor	> 0.90
CCT (K)	3000/4000/6500
Luminaire Rated Life (hr)	30000
Ambient Temp. ta (°C)	35
Weight (kg)	1.9

## Packaging Details

Model	PBD435CT
Product Carton Qty per box (pc)	1
Product Carton Dimension (mm)	672 X 78 X 84

## Lighting Data

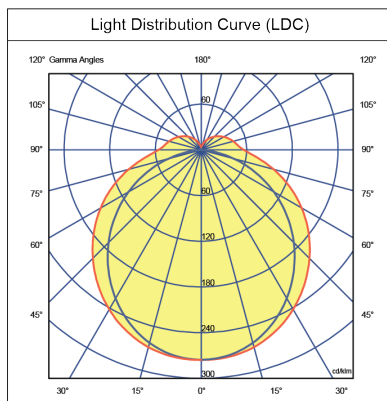

# PHOEBE CT

Commercial Lighting / Batten

## Dimensions

