

Phoebe CT

Commercial Lighting / Batten



DAVIS LIGHTING

Features

- Switchable colour temperature (3000K-4000K-6500K)
- White powder coated mild steel body
- Opalised polycarbonate diffuser
- Quick and easy installation
- Suitable for surface or pendant mount

Applications

- Retail shops
- Kitchens, canteens
- Public amenities
- Corridor and entrance areas
- Covered car parks, workshops


Options

- Dimmable
- Sensor
- Emergency


Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.1
- IEC/AS/NZS CISPR 15

Mounting Methods



Surface mounted



Pendant



Warm White



Cool White



Day Light



Phoebe CT

Commercial Lighting / Batten



DAVIS LIGHTING


Specifications

Model	PBD220CT	PBD420CT	PBD435CT	PBW220CT	PBW420CT	PBW435CT
Format	Diffused			Wired Guard		
Nominal Power (W)	20	20	35	20	20	35
Input Voltage	220 - 240 VAC 50 / 60 Hz					
Luminous Flux (lm)	2210	2240	4220	2120	2260	4240
Efficacy (lm/W)	110	112	120	110	113	120
CRI	> 80					
Power Factor	> 0.90					
CCT Switchable (K)	3000-4000-6500					
Rated Life L70B50 (hr)	30,000					
Ambient Temp. t_a (°C)	35					
Weight (kg)	1.2	1.9	1.9	1.1	2.1	2.1


Dimming, Sensor & Emergency version available upon request

Lighting Data

PBD420CT


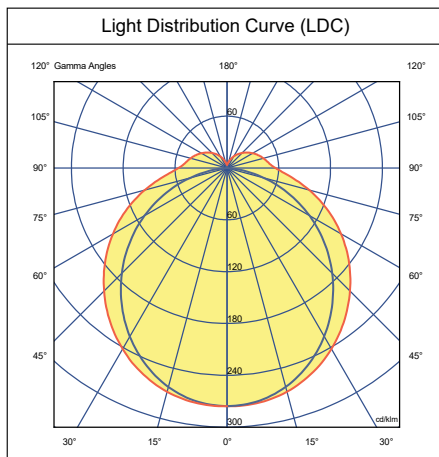


PBW420CT

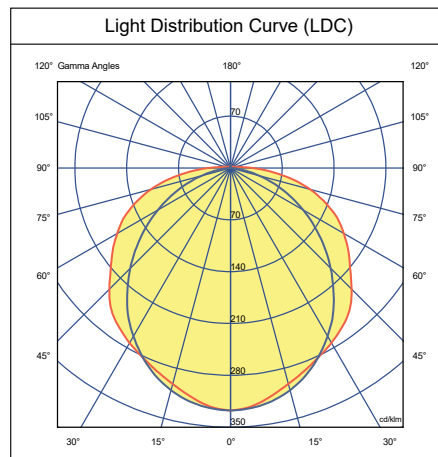



Dimensions

PBD CT

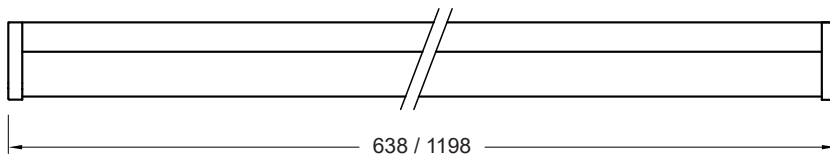

CCT Selection Switch

PBW CT

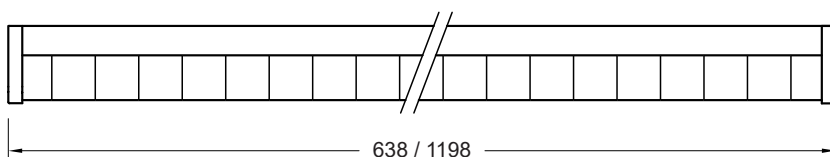

Tri-Colour Temperatures LED



davislighting.com



davislighting.com.au

All photometric and electrical data published are of $\pm 10\%$ tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

PB CT 201218