

# Calypso G2

LED Bulkhead



Model	CYS12BAG2xK	CYS12BEG2xK	CYL16BAG2xK	CYL16BEG2xK
Diameter (mm)	Ø 265		Ø 360	
Nominal Power (W)	12		16	
Input Voltage	220 - 240 VAC 50 / 60 Hz			
Luminous Flux (lm)	1050	830	1340	1030
Efficacy (lm/W)	90	70	84	64
Power Factor	0.90			
Colour Temp. (K)	3000 / 4000 / 6000			
LED Life (hr)	50,000			
Ambient Temp. (Ta)	40 °C			
Weight (kg)	1.3		2.6	

■ "x" denotes CCT, 3 = 3000K ; 4 = 4000K ; 6 = 6500K

## FEATURES

- Ø 265 mm 12W and Ø 360 mm 16W models
- Powdercoated die-cast aluminium body
- Opal UV stable polycarbonate diffuser
- Stainless steel screws
- One-piece silicon gasket
- Additional knockouts for through-wiring
- High performance 50,000 hr LEDs

## APPLICATIONS

- Domestic & commercial building exteriors
- Gardens
- Poolside areas
- Walkways
- Entrance areas
- Landscape dividers

## OPTIONS


- CCT 3000K / 4000K / 6000K
- Open or eyelid fascia
- Black or grey finish

Manufactured under ISO 9001:2015 to standards


- IES/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.1
- IEC/AS/NZS CISPR 15

## LIGHTING DATA

### ■ CYL16BAG24K


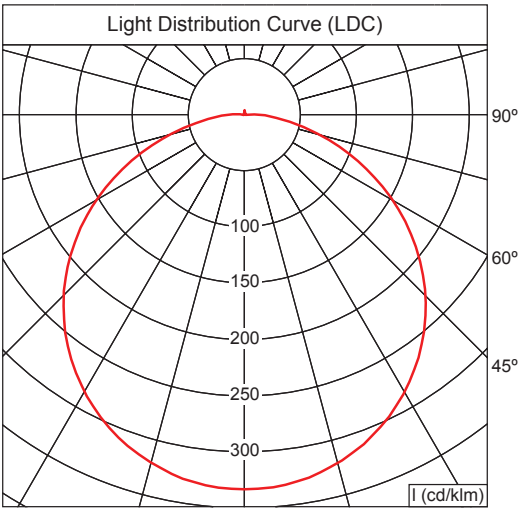


### ■ CYL16BEG24K


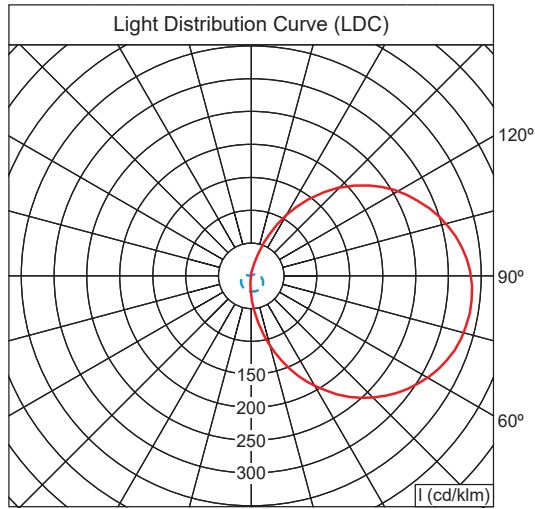


## DIMENSIONS

### ■ CYS12

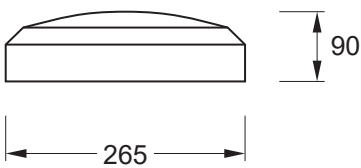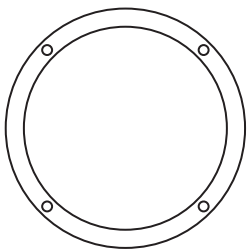

### ■ CYL16

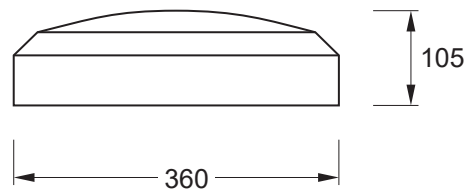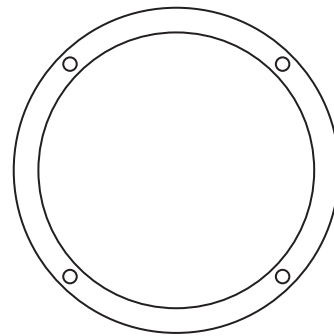

## MODEL NO. REFERENCE

Model	Diameter	Power	Colour	Facia		Colour Temp.
CY	S = 265mm	12 = 12W	B = Black	A = Plain	G2	3K = 3000K
	L = 360mm	16 = 16W	G = Grey	E = Eyelid		4K = 4000K
						6K = 6000K

e.g. CYS12BEG24K = 265mm 12W Black Eyelid 4000K



Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.